


HOIST RINGS



ANGULAR CONTACT BEARING SWIVELS


- The rotating ring is made of high-strength and high toughness special alloy steel forged and precision processed, all of which have undergone quenching and tempering heat treatment.
- The surface of the rotating ring is coated with plastic, which enables the product to have good corrosion resistance and service life.
- The design safety factor of the rotating ring is 4:1.
- The independent test load during the certification of the rotating ring test should be twice the safe working load.

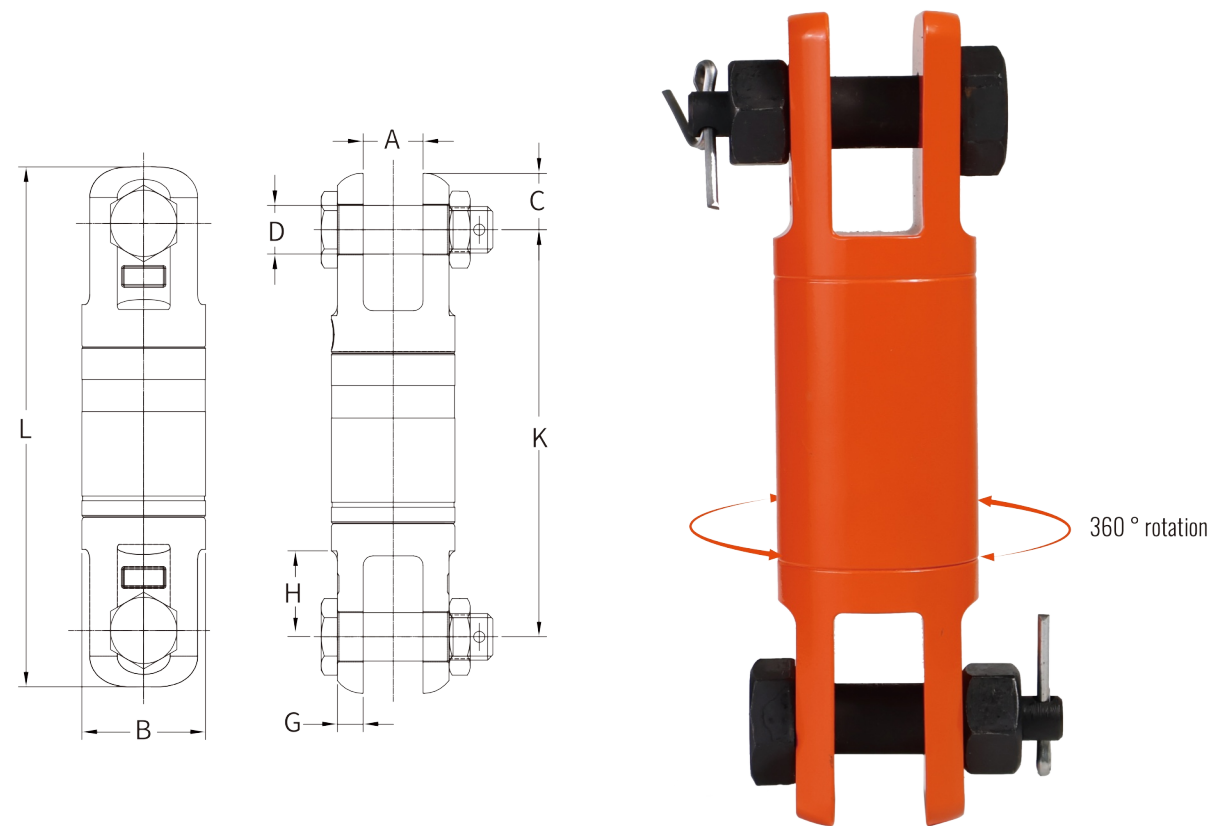

Angular Contat Bearing Swivels-UU

ITEM NO	SIZE	WLL/T	Technical Parameter mm								Kg
			B	K	L	C	A	D	G	H	
YD086-007	0.75	0.75	34	107	133	13	15	10	6	22	0.5
YD086-015	1.50	1.50	40	119	159	20	18	13	8	26	0.9
YD086-030	3.00	3.00	53	160	210	25	23	19	10	32	2.3
YD086-050	5.00	5.00	67	203	267	32	32	22	14	37	4.4
YD086-085	8.50	8.50	78	250	326	38	40	30	14	54	7.6
YD086-100	10.00	10.00	106	310	410	50	42	38	25	54	19.5
YD086-150	15.00	15.00	119	320	440	60	48	38	25	57	21.7
YD086-250	25.00	25.00	137	405	535	65	62	50	30	70	39.5
YD086-350	35.00	35.00	154	415	545	65	62	50	33	70	46.2
YD086-600	60.00	60.00	270	670	890	110	100	80	75	120	352.0

★ Safety factor 4:1.

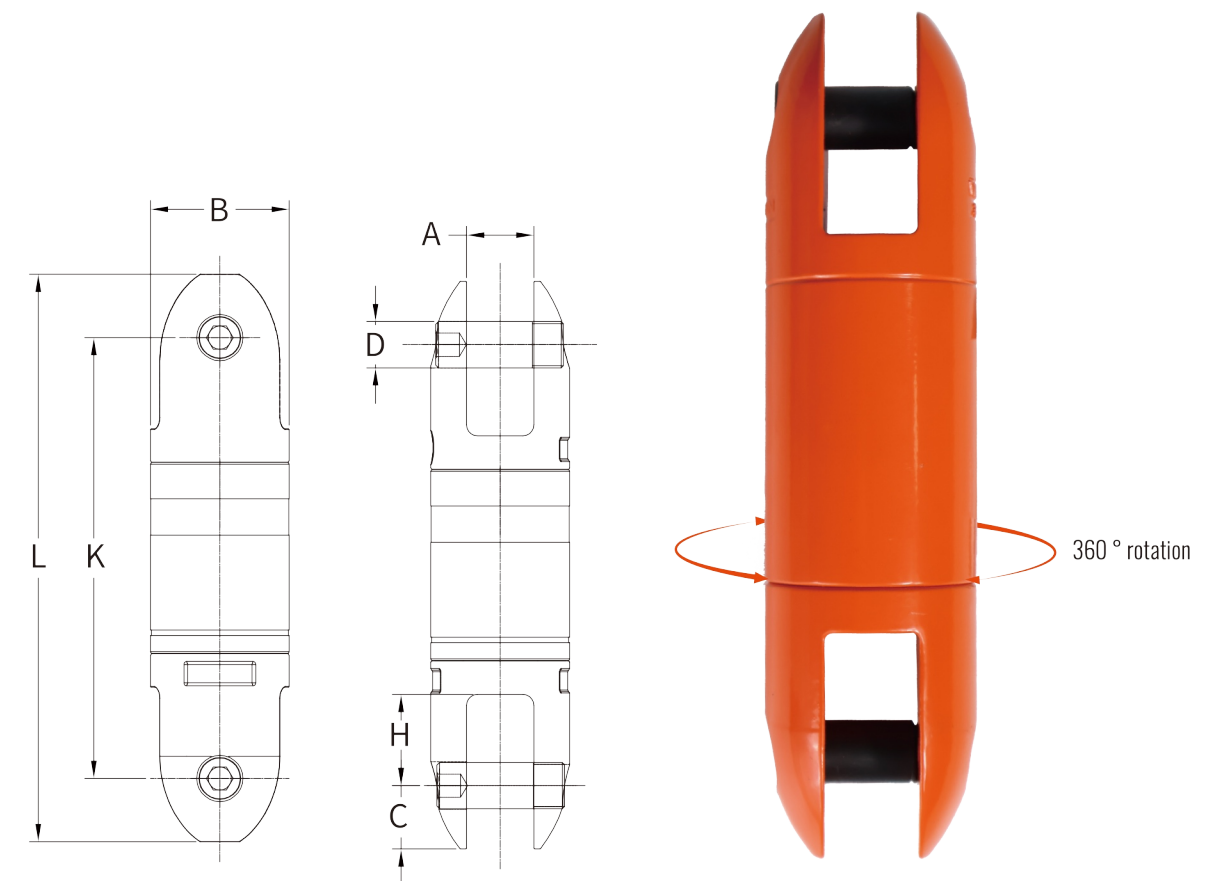


Angular Contat Bearing Swivels-Style

ITEM NO	SIZE	WLL/T	Technical Parameter mm							Kg
			B	K	L	C	A	D	H	
YD087-007	0.75	0.75	34	107	131	12	15	10	22	0.5
YD087-015	1.50	1.50	40	119	151	16	18	12	26	0.8
YD087-030	3.00	3.00	53	160	210	25	23	16	32	2.0
YD087-050	5.00	5.00	67	205	267	31	32	22	37	3.9
YD087-085	8.50	8.50	78	246	316	35	37	24	50	6.7
YD087-100	10.00	10.00	106	316	408	46	42	38	53	18.6
YD087-150	15.00	15.00	119	330	426	48	48	38	56	19.9
YD087-250	25.00	25.00	137	403	525	61	62	50	69	36.5
YD087-350	35.00	35.00	154	423	545	61	62	50	69	47.6

★ Safety factor 4:1.




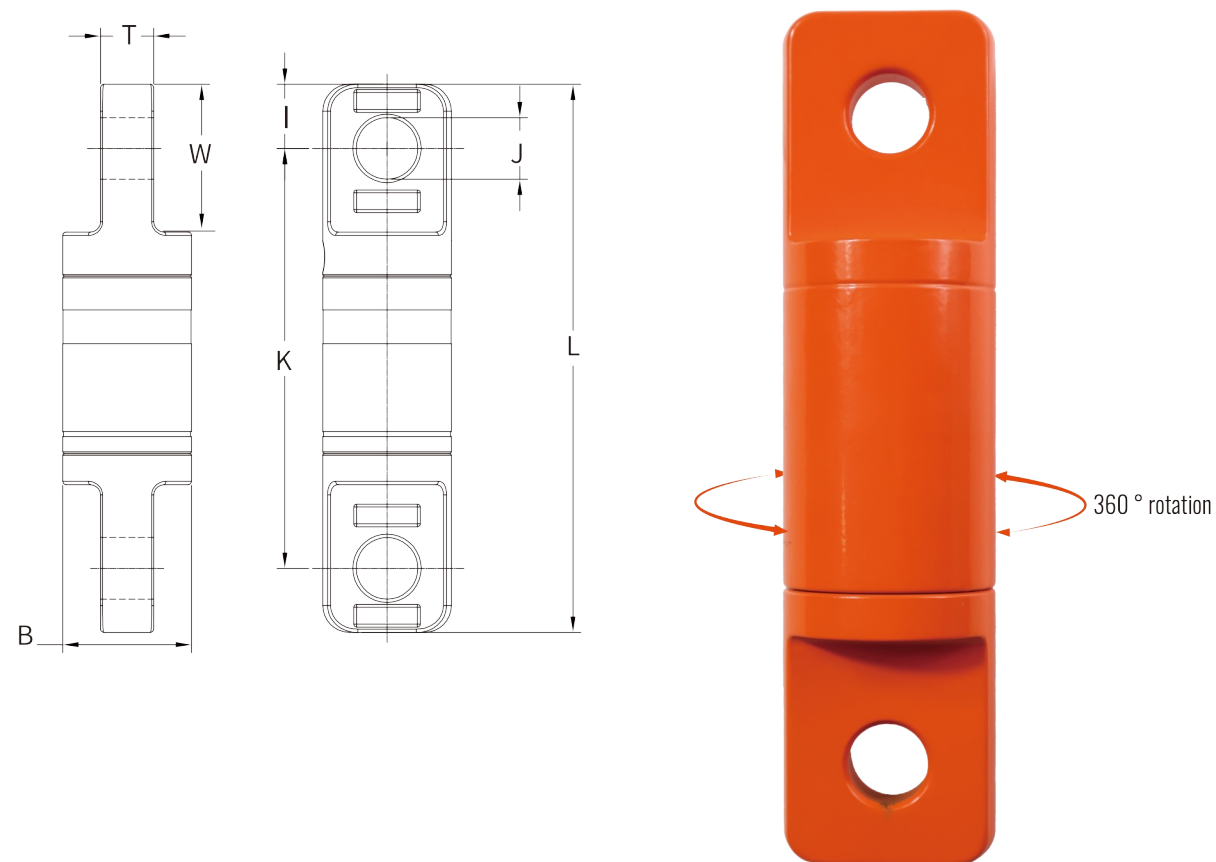

Angular Contat Bearing Swivels-00

ITEM NO	SIZE	WLL/T	Technical Parameter mm							Kg
			B	K	L	I	T	J	W	
YD088-007	0.75	0.75	34	107	133	13	12	10.5	35	0.5
YD088-015	1.50	1.50	40	119	159	20	15	13.5	46	0.9
YD088-030	3.00	3.00	53	160	210	25	20	20.0	57	2.1
YD088-050	5.00	5.00	67	203	267	32	26	33.0	69	4.3
YD088-085	8.50	8.50	78	250	326	38	32	37.0	92	7.3
YD088-100	10.00	10.00	106	310	410	50	42	44.0	104	17.0
YD088-150	15.00	15.00	119	320	440	60	49	54.0	117	21.2
YD088-250	25.00	25.00	137	405	545	70	60	66.0	140	39.0
YD088-350	35.00	35.00	154	415	555	70	60	66.0	140	45.8
YD088-600	60.00	60.00	270	670	890	110	75	80.0	230	253.0

★ Safety factor 4:1.

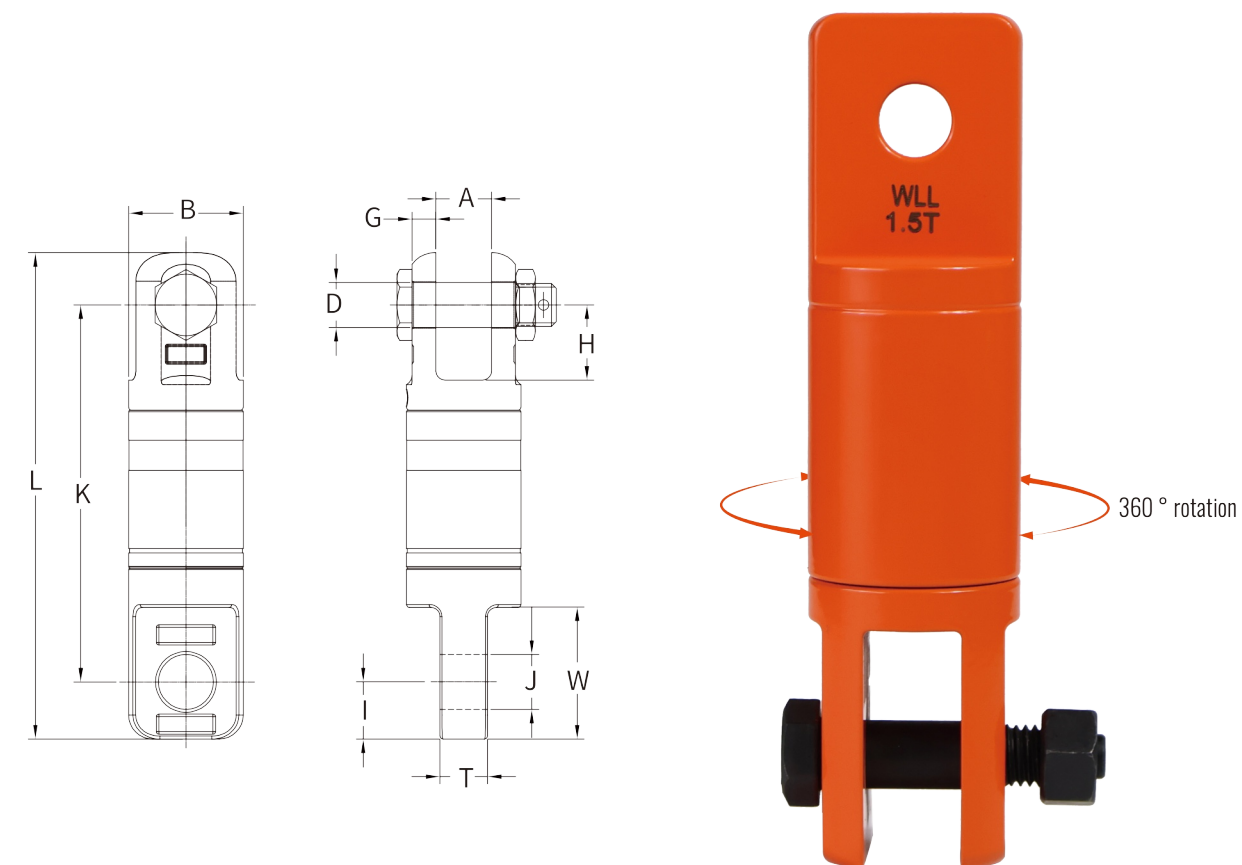

Angular Contat Bearing Swivels-OU

ITEM NO	SIZE	WLL/T	Technical Parameter mm											Kg
			B	K	L	A	G	D	H	T	J	W	I	
YD089-007	0.75	0.75	34	107	133	15	6	10	22	12	10.5	35	13	0.5
YD089-015	1.50	1.50	40	119	159	18	8	13	26	15	13.5	46	20	0.9
YD089-030	3.00	3.00	53	160	210	23	10	19	32	20	20.0	57	25	2.2
YD089-050	5.00	5.00	67	203	267	32	14	22	37	26	33.0	69	32	4.4
YD089-085	8.50	8.50	78	250	326	40	14	30	54	32	37.0	92	38	7.4
YD089-100	10.00	10.00	106	310	410	42	25	38	54	42	44.0	104	50	18.0
YD089-150	15.00	15.00	119	320	440	48	25	38	57	49	54.0	117	60	21.2
YD089-250	25.00	25.00	137	405	540	62	30	50	70	60	66.0	140	70	40.0
YD089-350	35.00	35.00	154	415	550	62	33	50	70	60	66.0	140	70	46.7
YD089-600	60.00	60.00	270	670	890	100	75	80	120	75	80.0	230	110	302.0

★ Safety factor 4:1.

